


Installation Instructions

PARTS LIST:


Qty	Item Description	Qty	Item Description
1	Grille Guard	6	10-1.5mm x 35mm Hex Bolts
1	Driver/Left Mounting Bracket	18	10mm x 27mm OD x 3mm Flat Washers
1	Passenger/Right Mounting Bracket	10	10mm Hex Nuts
1	Driver/Left Support Bracket	2	10-1.5mm x 35mm Bolt Plates
1	Passenger/Right Support Bracket	2	PVC Plastic Retainers
10	10mm Lock Washers	2	10-1.5mm x 35mm Button Head Bolts

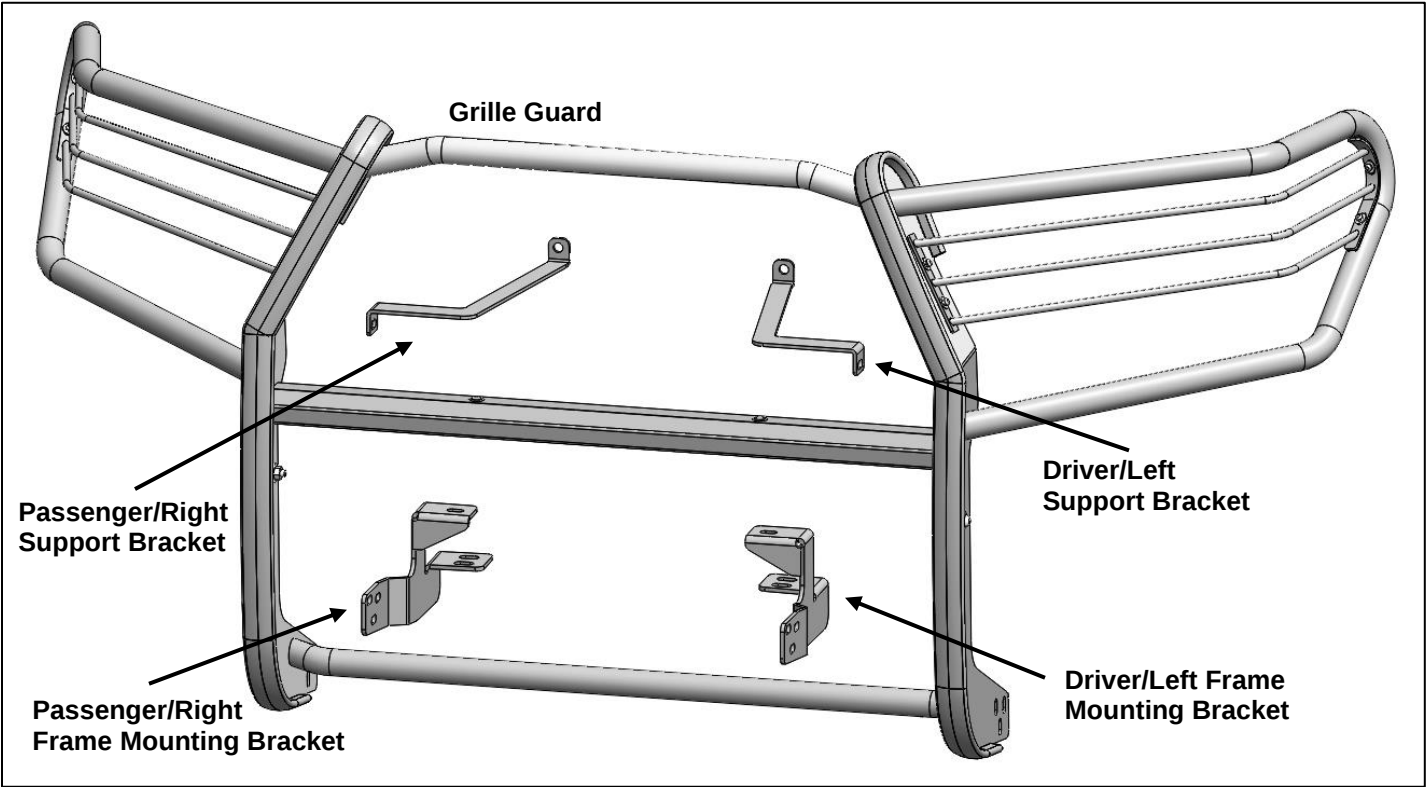

Button
Head Bolt



Hex Bolt



Hex Nut



Flat
Washer



Lock
Washer

TOOLS REQUIRED



Ratchet



15mm Socket




Extensions




Wrench

1


Follow (Fig 1 – 12) to attach Support and Frame Mounting Brackets, the attach Grille Guard to Brackets. Complete each step on both Passenger and Driver side. Ensure all hardware is hand tightened at this point.

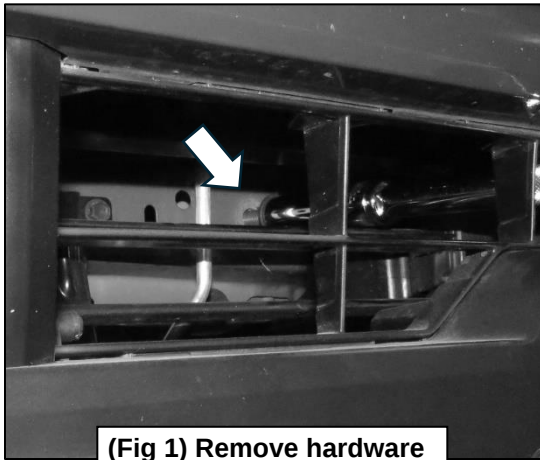


(Fig 1) Remove hardware from behind Grille

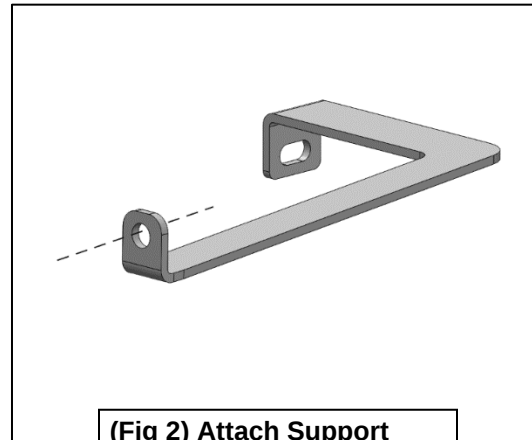


(Fig 2) Attach Support Bracket reusing hardware

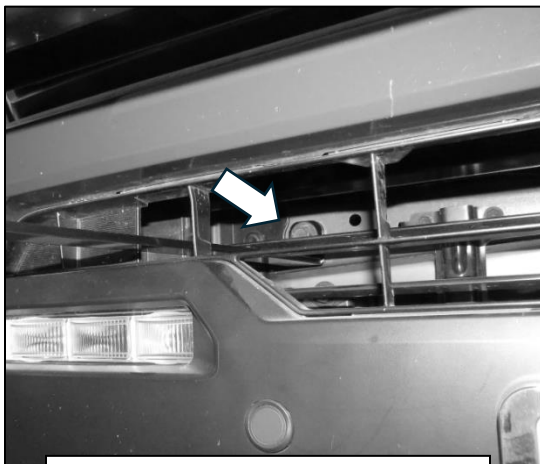





(Fig 3) Attached Support Bracket

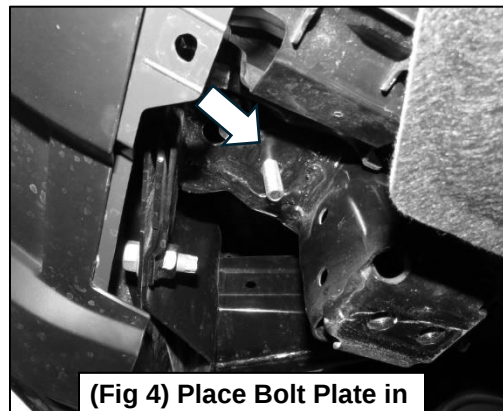


(Fig 4) Place Bolt Plate in upper Frame Mounting Bracket mounting point

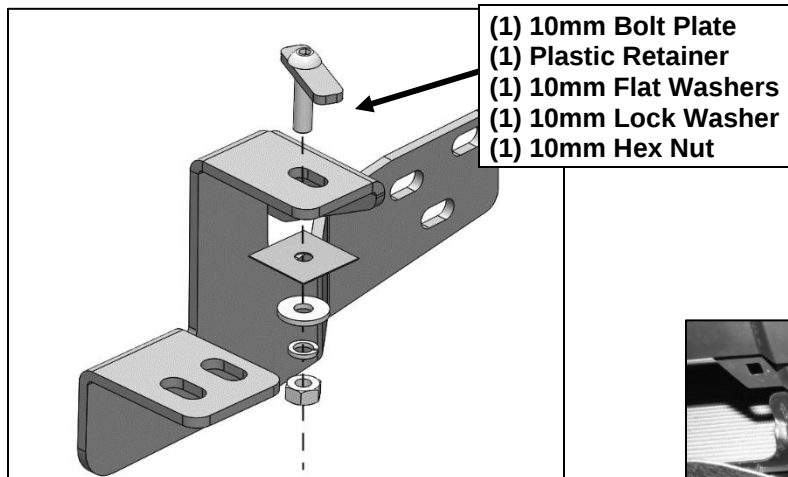


(Fig 5) Attach Frame Mounting Bracket

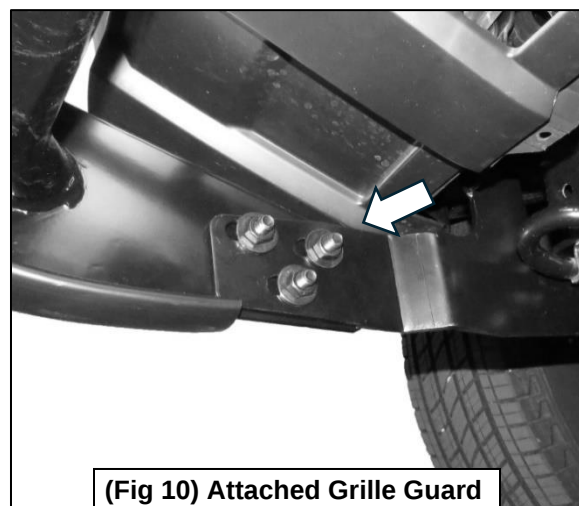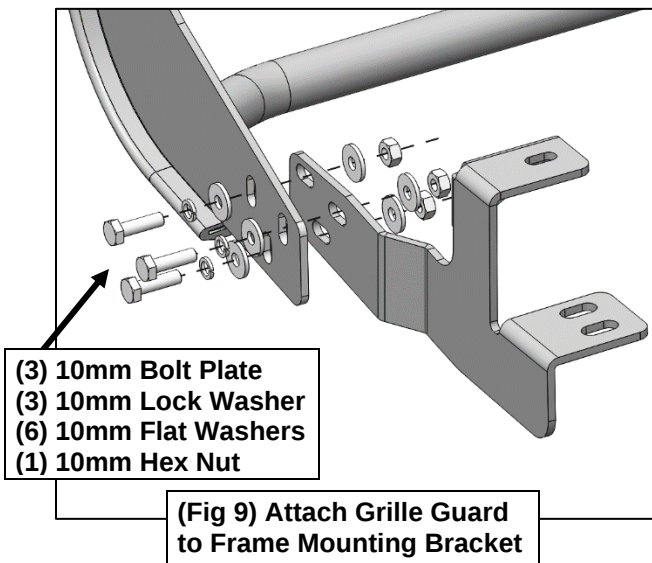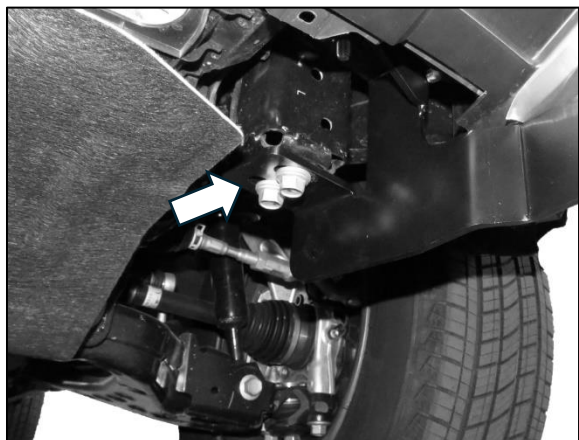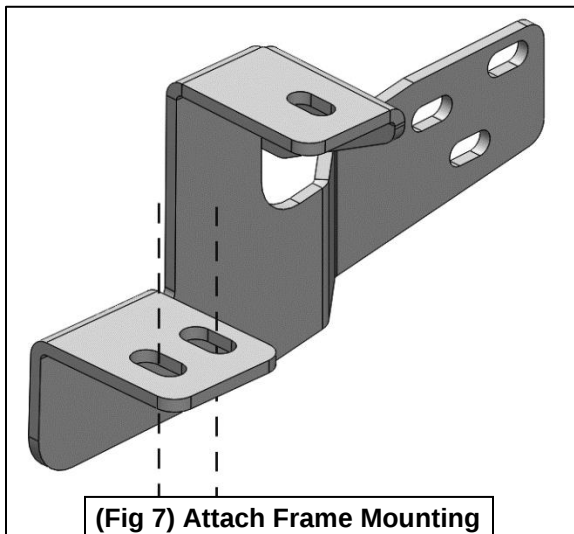

- (1) 10mm Button Head Bolt
- (1) 10mm Lock Washer
- (2) 10mm Flat Washers
- (1) 10mm Hex Nut

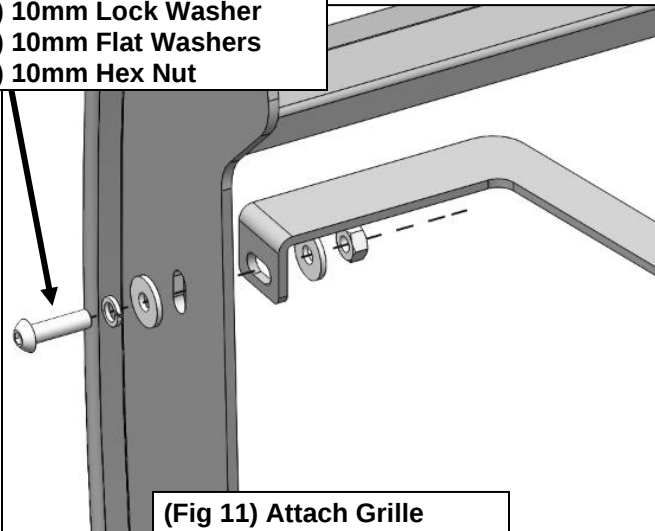

(Fig 11) Attach Grille Guard to Support Bracket

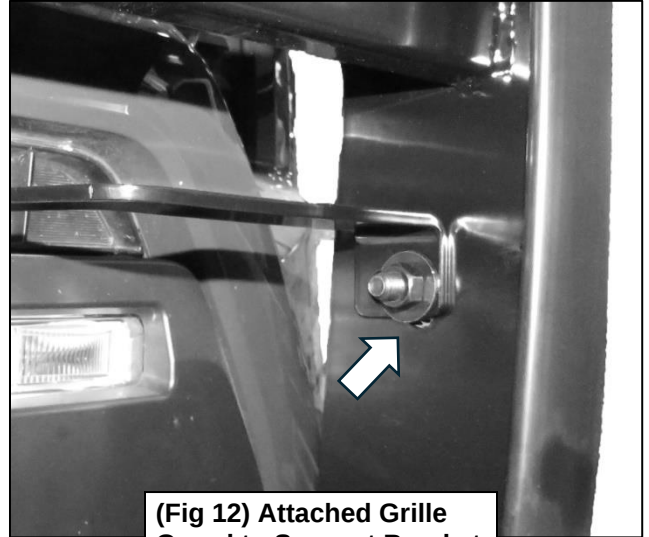

(Fig 12) Attached Grille Guard to Support Bracket

2

Ensure Grille Guard is level, then tighten all fasteners. Installation is complete. Do periodic inspections to the installation to make sure that all hardware is secure and tight.



Complete Installation