


**ELEVATION FRONT BUMPER
2015-22 KAWASAKI MULE PRO-FXT**

PARTS LIST:

1	Elevation Front Bumper	6	10mm Nylon Lock Nuts
1	Skid Plate	3	8-1.25mm Carriage Bolts
1	Winch Mounting Bracket	6	8mm x 24mm x 2mm Flat Washers
6	10-1.5mm x 25mm Hex Bolts	3	8mm Lock Washers
12	10mm x 20mm x 2mm Flat Washers	3	8mm Hex Nuts

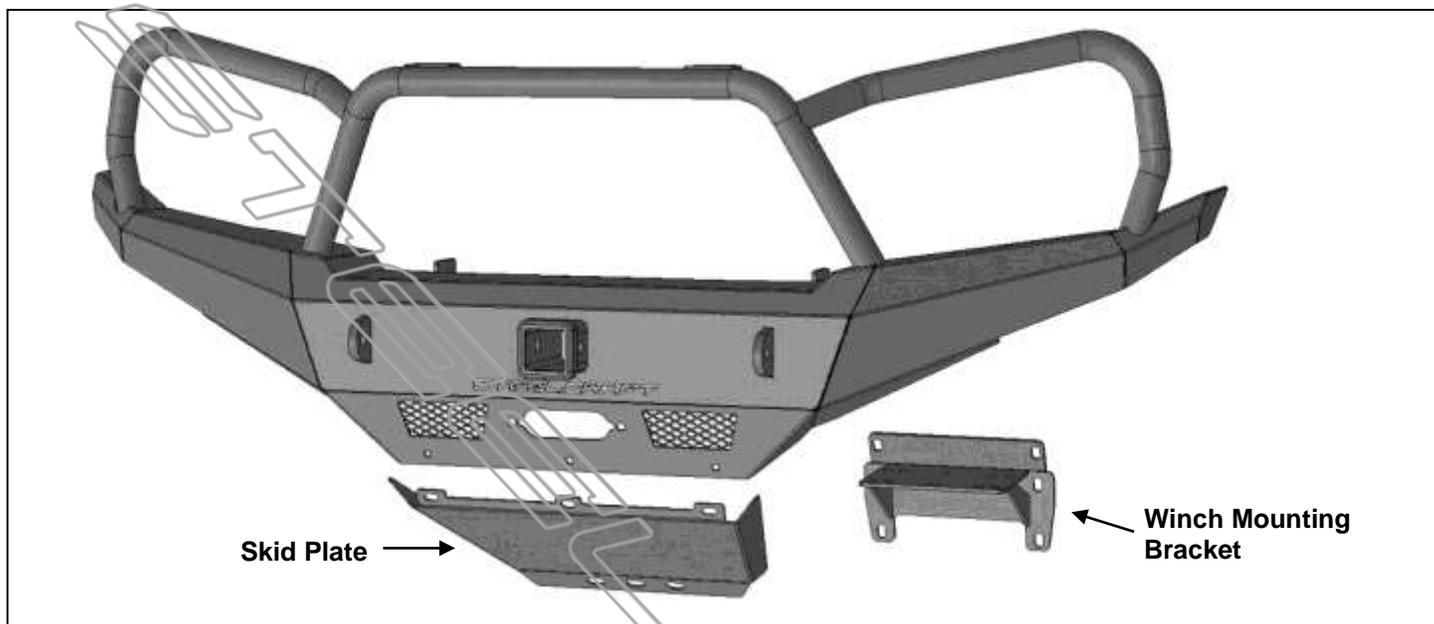

PROCEDURE:


REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT. READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION. ASSISTANCE IS RECOMMENDED TO AVOID POSSIBLE INJURY OR DAMAGE TO THE VEHICLE.

1. With assistance, remove the factory bumper, **(Figures 1 & 2)**. Do not discard factory hardware.
2. Select the Winch Mounting Bracket, (installation is optional). Attach Bracket to front of frame with the included (6) 10mm x 25mm Hex Bolts, (12) 10mm Flat Washers and (6) 10mm Nylon Lock Nuts, **(Figures 3 & 4)**. Fully tighten hardware.
3. Follow instructions packaged with winch to attach winch to top of Bracket and electrical system. **NOTE:** Winch and cable guide not included.
4. Select the lower Skid Plate. Attach Skid Plate to front of lower frame crossmember with (3) factory bolts and (3) 8mm Large Flat Washers, **(Figures 5 & 6)**. Do not fully tighten hardware at this time.
5. Carefully unpack the Elevation Bumper. Attach cable guide, (not included), to Bumper. Attach the Bumper to the top of the Skid Plate with the included (3) 8mm Carriage Bolts, (3) 8mm Flat Washers, (3) 8mm Lock Washers and (3) 8mm Hex Nuts, **(Figures 7 & 8)**. Reuse the factory hex bolts to attach the upper mounting tabs to the sides of the frame, **(Figures 9 & 10)**.
6. Level and adjust the Bumper and fully tighten all hardware.
7. Do periodic inspections to the installation to make sure that all hardware is secure and tight.


To protect your investment, Do not use any type of polish or wax that may contain abrasives that could damage the finish. Mild soap may be used to clean the Elevation Bumper assembly.

ELEVATION FRONT BUMPER
2015-22 KAWASAKI MULE PRO-FXT


Driver/left side installation pictured

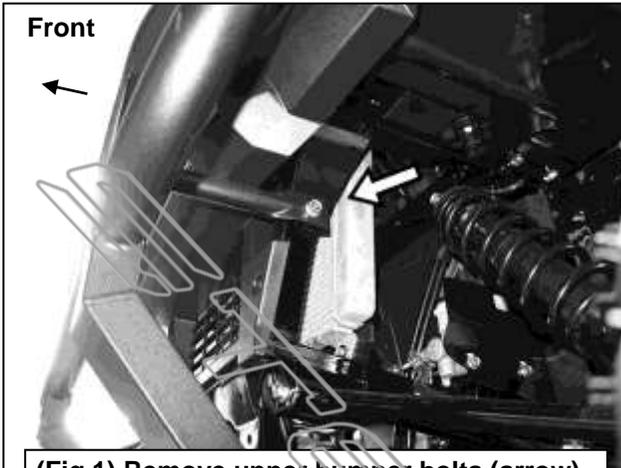

(Fig 1) Remove upper bumper bolts (arrow)

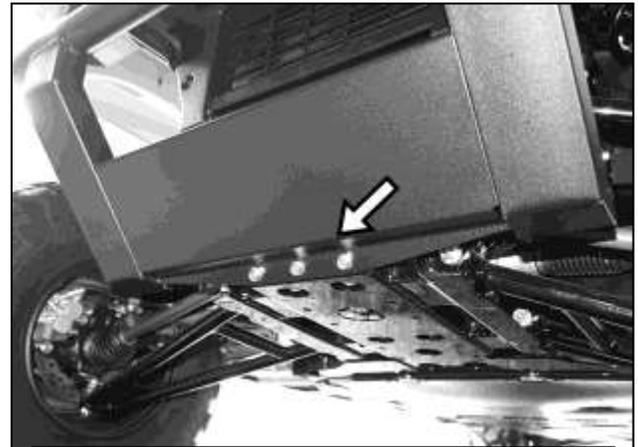


(Fig 2) Remove lower bumper bolts (arrow)

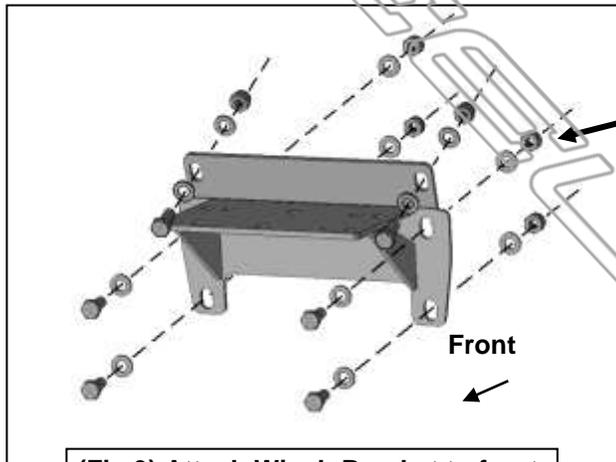


(Fig 3) Attach Winch Bracket to front of frame (installation optional)

- (6) 10mm x 25mm Hex Bolts
- (12) 10mm Flat Washers
- (6) 10mm Lock Nuts

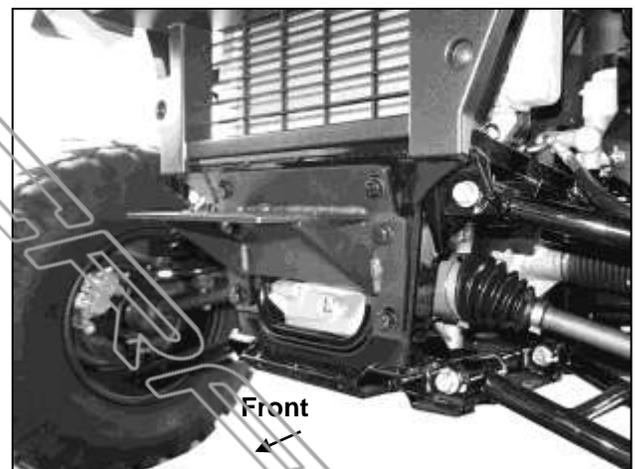


(Fig 4) Winch Mount installed

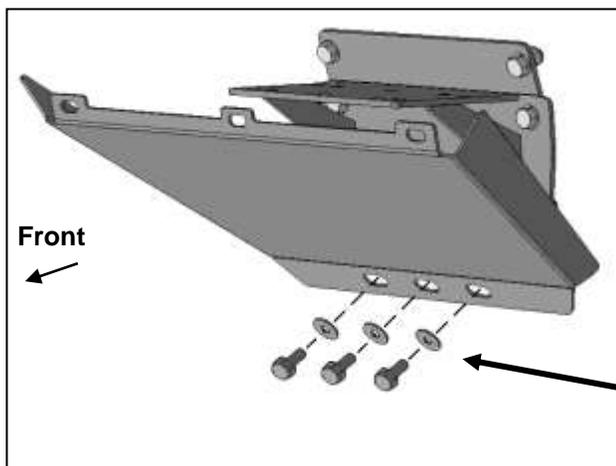

(Fig 5) Attach bottom of Skid Plate to front of frame


- (3) Reuse factory bolts
- (3) 8mm Flat Washers

**ELEVATION FRONT BUMPER
2015-22 KAWASAKI MULE PRO-FXT**

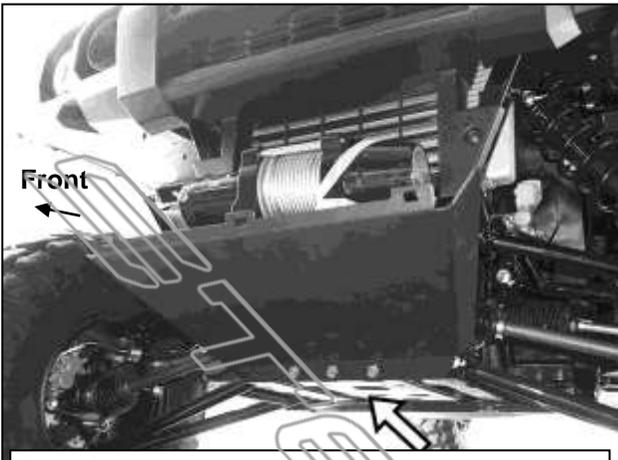


(Fig 6) Winch Mount and Skid Plate installed

- (3) 8mm Carriage Bolts**
- (3) 8mm Flat Washers**
- (3) 8mm Lock Washers**
- (3) 8mm Hex Nuts**

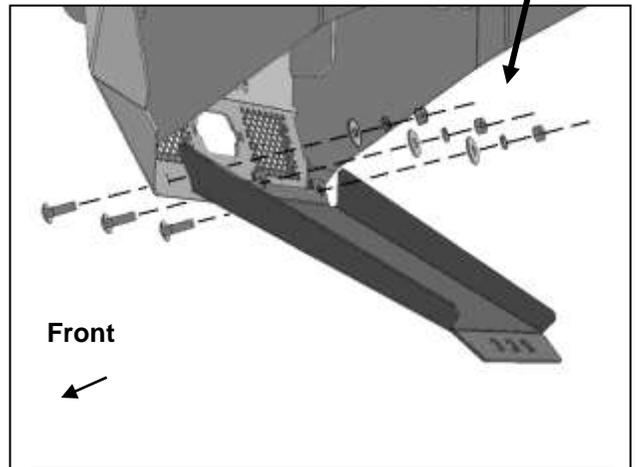


(Fig 7) Attach Bumper to front of Skid Plate

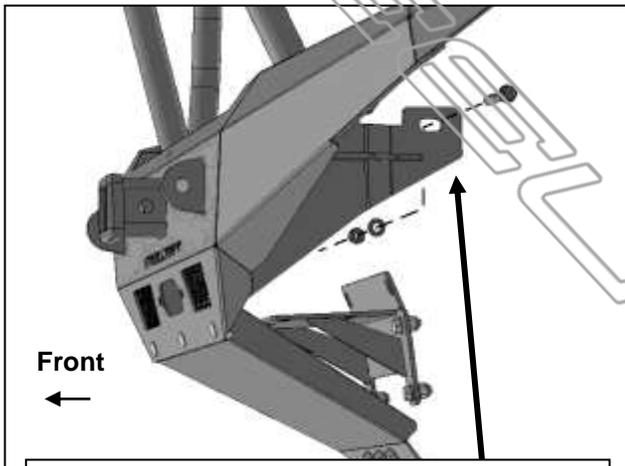

(Fig 8) Reuse factory bolts to attach top mount on back of Bumper to sides of frame



Complete Installation (cable guide not included)

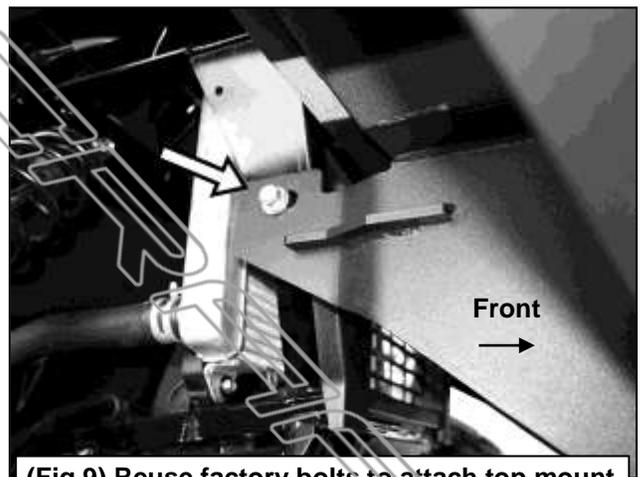

(Fig 9) Reuse factory bolts to attach top mount on back of Bumper to sides of frame (arrow). Passenger/right side pictured installed